

Product Description

LF-GMR040YSII is an LED driver with metal casing. The rated input voltage range is 220-240Vac. The maximum output power is 44.1W. The output voltage range is 33-42Vdc. The output current range is 800-1050mA. It has features of two-stage design, high efficiency and excellent flicker free effect and is suitable for linear light, tri-proof light, etc.

Features

- Suitable for Class I light fixtures
- Flicker free
- High performance, high efficiency, low THD
- 5-year warranty (Please refer to the warranty condition.)




Applications

- Indoor office lighting
- Decorative lighting
- Commercial lighting
- Residential lighting



Product Naming

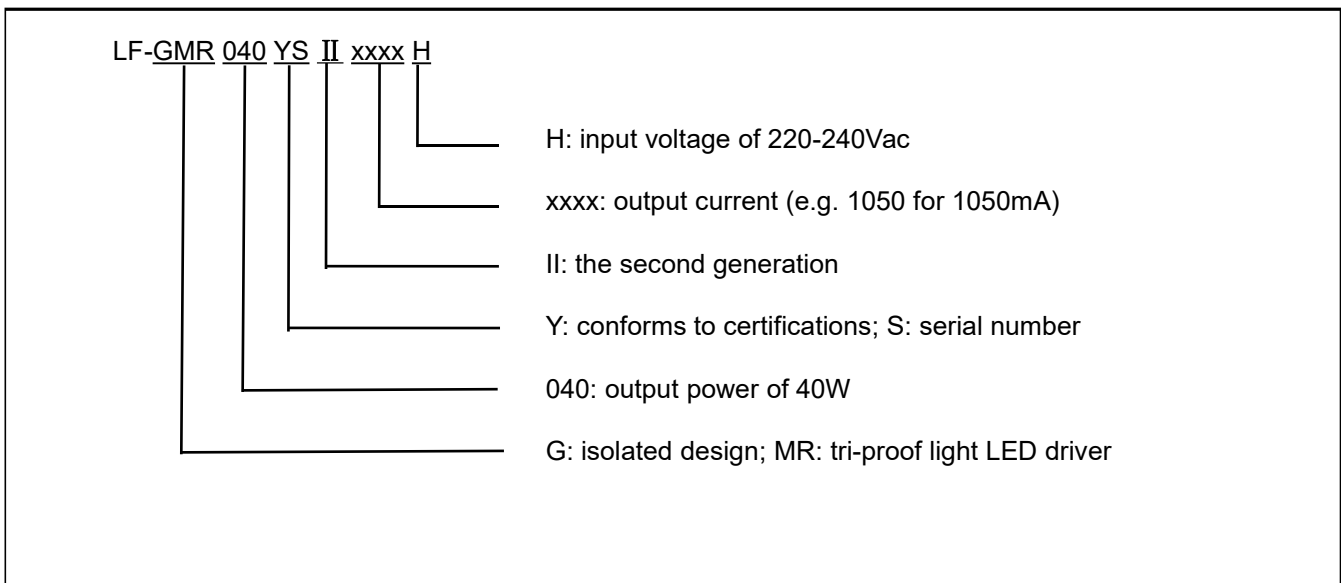


Electrical Characteristics

Model		LF-GMR040YSIIxxxxH					
Output	Output Voltage	33-42Vdc					
	Output Current	800mA	850mA	900mA	950mA	1000mA	1050mA
	Flicker Index (Modulation Depth)	Conforms to the IEEE1789 standard					
	CIE SVM	≤0.4					
	IEC-Pst	≤1					
	Current Tolerance	±5%					
	Temperature Drift	±10%					
	Start-up Time	<0.5S					
Input	AC Input Voltage	220-240Vac (limit: 200-264Vac)					
	DC Input Voltage	200-264Vdc					
	Input Frequency	47Hz-63Hz					
	Input Current	0.26A Max					
	Power Factor	≥0.9					
	THD	≤20%					
	Efficiency	≥88%					
	In-rush Current	≤25A@150uS					
	Load Quantity Carried by the Circuit Breaker	Circuit Breaker Model	B10	C10	B16	C16	
		Quantity (pcs)	23	40	38	64	
	Leakage Current	≤0.7mA					
Standby Power Consumption	≤0.5W						
Protection	Open Circuit Protection	<55V					
	Short Circuit Protection	Hiccup mode (auto-recovery)					
Environment Description	Operating Temperature	-30℃~+50℃					
	Operating Humidity	20-90%RH (no condensation)					
	Storage Temperature/ Humidity	-40℃~+ 80℃ (six months under class I environment); 10-90%RH (no condensation)					
	Atmospheric Pressure	86KPa~106KPa					


Safety and Electromagnetic Compatibility	Certification	ENEC, CB, CE, RCM, CCC, SAA
	Withstanding Voltage	I/P-O/P: 3.75KVac <5mA 60S; I/P-PG: 1.5KVac <5mA 60S; O/P-PG: 0.5KVac <5mA 60S
	Insulation Resistance	I/P-O/P: >100MΩ@500VDC
	Safety Standard	EN61347-1:2015, EN61347-2-13: 2014/A1: 2017, EN62384: 2016/A1: 2009, EN61347-2-13: 2014/A1: 2017, EN61347-1: 2015, EN62493: 2015 IEC 61347-1: 2015, IEC61347-2-3: 2014, IEC61347-2-13: 2014/AMD1: 2016 AS61347.2-13: 2018 GB19510.1-2009, GB19510.14-2009
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 CCC: GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5, 6, 11 (L-N:1KV L/N-PG:2KV) CCC: GB/T17626.2, 3, 4, 5, 6, 11 (L-N: 1KV L/N-PG: 2KV)
Others	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty	5 yrs (Tc≤75℃)
Test Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66202, Oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: TH9201B, flicker-free tester (flicker-free coefficient tester) 60N-01, etc.	
Remarks	<ol style="list-style-type: none"> 1. It is recommended that customer should install overvoltage and undervoltage protection devices and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity. 2. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer re-confirms the EMC of the whole LED light fixture. 3. The test conditions of the circuit breaker configuration quantity are the same as those of the inrush current test. 4. Unless otherwise stated, the parameters of the power factor, harmonic and efficiency were test results under the ambient temperature of 25℃, humidity of 50%, input voltage of 230Vac(50Hz) and full load. 	

Characteristic Curves


■ **PF Curve**

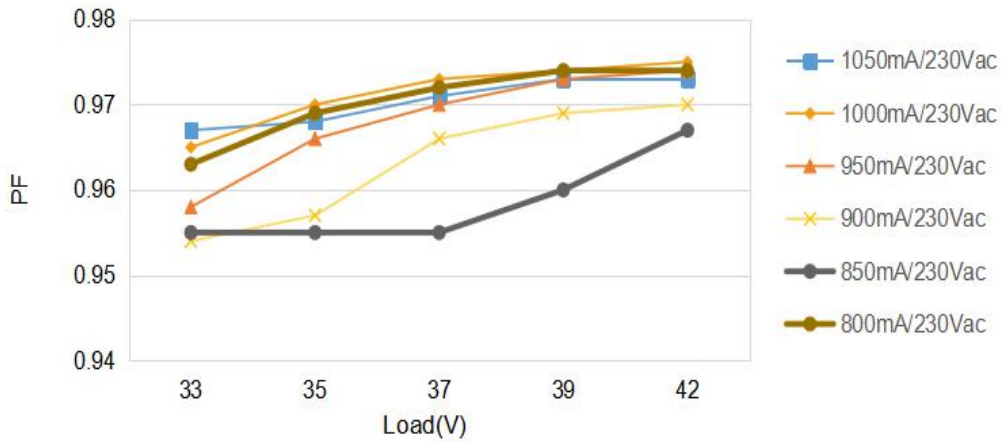

■ **Efficiency Curve**

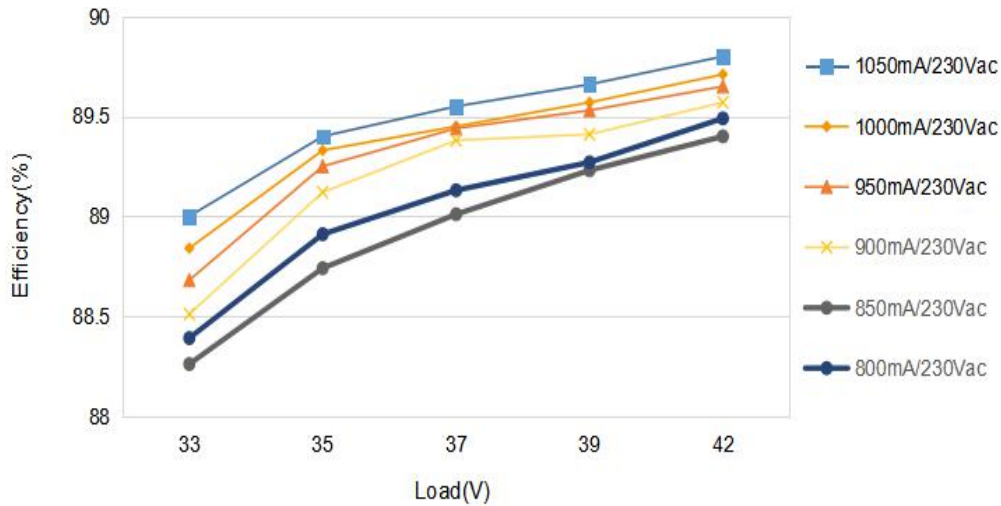

■ **Lifetime Curve**

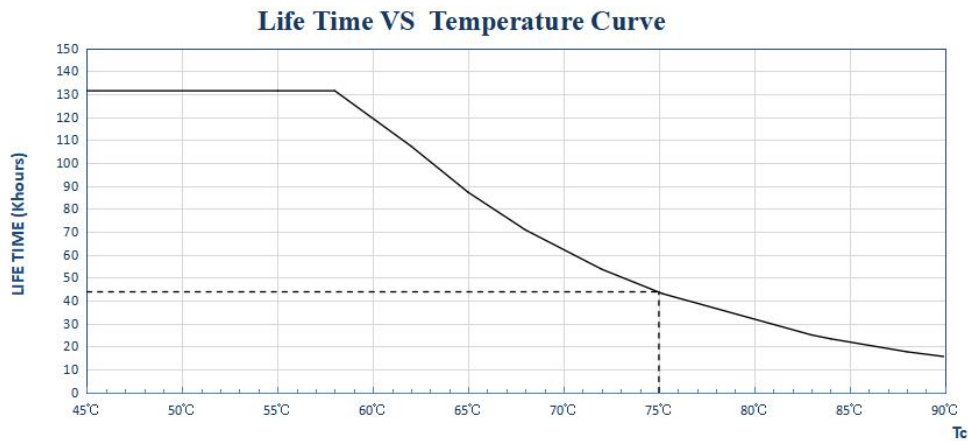

Definition of the Driver's Terminals

INPUT

AC-L	Input terminal of AC live wire
AC-N	Input terminal of AC neutral wire
	Grounding wire


OUTPUT

LED+	The driver's positive electrode output
LED-	The driver's negative electrode output

Label

INPUT AC-L AC-N 0.75-1.5 □		Un: 220-240V~ In: 0.26A Fn: 50/60Hz I rated: xxxmA(CC) Output Voltage: 33-42V = P rated: xx.xW U out: 55V = tc: 85°C PF: 0.9C ta: 50°C	LED Driver(LED控制装置) Model: LF-GMR040YS II xxxH For LED modules only • tc	Preparation for input and output 17.5mm OUTPUT LED+ LED- 0.5-1.0 □
www.lifud.com Made in China (中国制造)				

Structure & Dimensions (unit: mm)

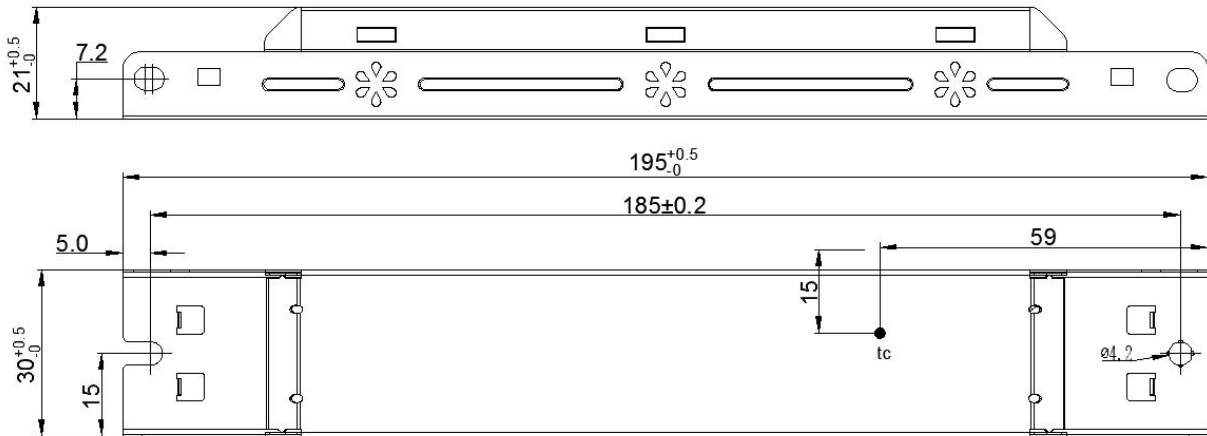

Packaging Specifications

Model	LF-GMR040YSII
Packaging Dimensions	385*285*210 mm (L*W*H)
Quantities	8 pcs/layer; 6 layers/ctn; 48 pcs/ctn
Weights	0.135kg±5%/pc; 7.33kg±5%/ctn

Transportation & Storage

■ Transportation

- Suitable transportation means: vehicles, boats and aircraft.
- During transportation, there should be awnings for rain protection and sun protection. Civilized loading and unloading are required. There should be no severe vibration or impact.

■ Storage

- Storage in accordance with the provisions of Class I environment. For products which have been stored for more than six months, they mustn't be used until they pass the re-inspection.

Attention

- Please use this product according to its specifications otherwise there may be malfunction.
- Use light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.