


D-Tube LED Replacement Disc

Easily convert your existing fluoro fitting to energy efficient LED


Plug-in replacement for D-shape fluoros
12 - 30V DC input
48 x 5050 SMD LEDs
800 lumens
Hi/low brightness switch
7w - high brightness
5w - low brightness
130mm diameter
Requires removal/shorting of fluoro ballast

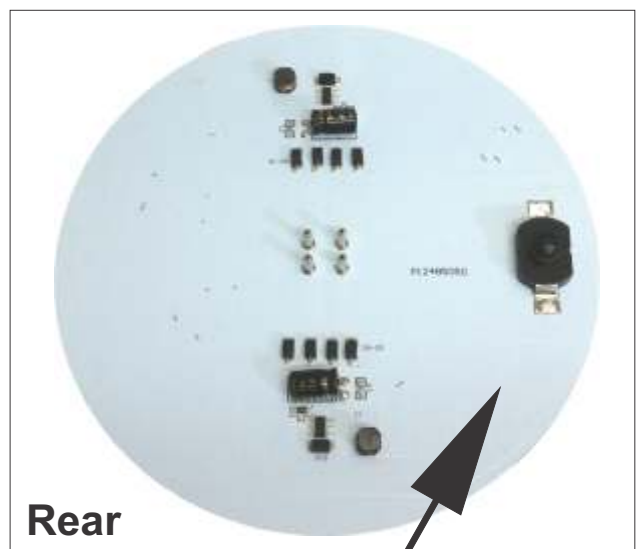

Hi/low brightness switch

D-Tube LED Replacement Disc Wiring Instructions

Ballast is completely removed
from circuit.
Input to terminal base is 10-30V DC.

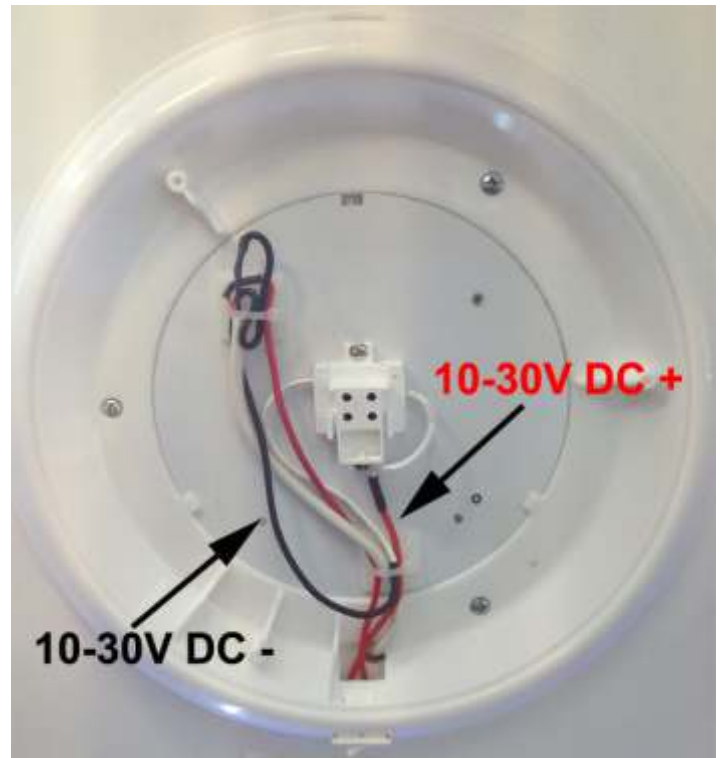

Ensure terminals have
+ and - connected on a
diagonal axis.
Both axes will work - not polarity
sensitive.

