

Features

- Flicker free
- High efficiency; high PF; IP20
- Suitable for emergency lighting
- Suitable for Class I light fixtures
- 5-year warranty (please refer to the warranty condition)



Applications


· Indoor office lighting · decorative lighting · commercial lighting

Descriptions

LF-FMR120YS is a 120W constant current LED driver. Its input voltage ranges from 220 to 240Vac and output current is adjustable from 300 to 750mA via DIP switch with every 50mA as a step. It is suitable for Class I light fixtures, including tri-proof light, linear light, etc.

Product Model

LF - F MR 120 YS

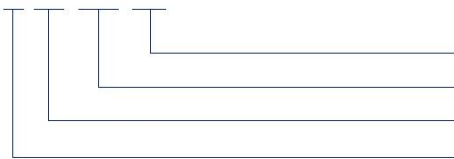

- Y: complies with certifications; S: serial number
- 120: output power: 120W
- MR: indoor metal casing tri-proof light
- F: non-isolated design

■ Electrical Characteristics

Model		LF-FMR120YS									
Output	Output Voltage	54-216Vdc									
	Output Current	Adjustable via DIP switch									
		300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	750mA
	Flicker Index	Complies with IEEE Std 1789-2015									
	CIE SVM	≤0.4									
	IEC-Pst	≤1									
	Current Tolerance	± 7%					± 5%				
	Temperature Drift	± 10%									
Startup Time	<0.5S										
Input	Input Voltage	220-240Vac (voltage limit: 198-264Vac)									
	DC Input Voltage	180-264Vdc									
	Input Frequency	0/50/60Hz									
	Input Current	0.66A max.@220-240Vac; 0.46-0.76A@180-264Vdc									
	PF	≥0.93					≥0.95				
		≤20%					≤10%				
	THD	≤20%					≤10%				
	Efficiency	≥94%		≥95%							
	Standby Power Consumption	<0.5W									
	Inrush Current	≤60A&210uS									
	Loading Quantities of Circuit Breaker	Model		B10		C10		B16		C16	
		Quantity (pcs)		6		11		11		18	
Leakage Current	≤0.7mA										
Protection Characteristics	Open Circuit	≤250V									
	Short Circuit	Auto-recovery									
Environment Descriptions	Operating Temperature	-30°C - +60°C									
	Operating Humidity	20-90%RH (no condensation)									
	Storage Temperature/ Humidity	-30°C - +80°C (6 months in Class I environment); 10-95%RH (no condensation)									
	Atmospheric Pressure	86-106kPa									

■ Electrical Characteristics


Safety & EMC	Certifications	ENEC, CE, CB, RCM, UKCA, EL, CCC
	Withstand Voltage	I/P-PG: 1.5kV&5mA&60S
	Insulation Resistance	I/P-PG O/P-PG: >100MΩ@500Vdc
	Safety Standards	ENEC: EN61347-2-13: 2014/A1: 2017, EN61347-1: 2015/A1: 2021, EN IEC 62384: 2020 CE-LVD: EN61347-2-13: 2014/A1: 2017, EN61347-1: 2015/A1: 2021 CB: IEC61347-1: 2015, IEC61347-1: 2015/AMD1: 2017, IEC61347-2-13: 2014, IEC61347-2-13: 2014/AMD1: 2016 UKCA-LVD: EN 61347-1: 2015/A1: 2021, EN 61347-2-13: 2014/A1: 2017 EN 62493: 2015 EL: EN IEC61347-2-13 Annex J CCC: GB 19510.1-2009, GB19510.14-2009
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 UKCA-EMC: EN IEC 55015: 2019/A11: 2020, EN 61547: 2009, EN IEC 61000-3-2: 2019/A1: 2021, EN 61000-3-3: 2013/A2: 2021 EL: EN IEC 61347-2-13 Annex J CCC: GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5 (lightning strike L-N: 1kV, L/N-PG: 2kV), 6, 11 CCC: GB/T17626.2, 3, 4, 5 (lightning strike L-N: 1kV, L/N-PG: 2kV), 6, 11
Other Parameters	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty	5 years (Tc≤81°C)
Test Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.	
Test Remark	If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac/50Hz.	

■ **Electrical Characteristics**


Additional Remarks	<ol style="list-style-type: none"> 1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety. 2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished. 3. The test conditions of the circuit breaker configuration quantity are the same as those of the inrush current. 4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above. 5. Output voltage: 54-216Vdc; max. output power: 120W; the voltage and current CANNOT exceed the rated power. 6. The output power does not meet the Eu-standard IEC61000-3-2 Class C individual harmonic requirement when the DIP switch is operating between 25W and 45W. 7. It is well-advised that the withstanding voltage of LEDs and aluminum substrates >3kV. 8. It is recommended to install double-pole switch at AC input terminal. If user uses the single-pole switch, make sure to connect it to wire L (live wire), otherwise the afterglow of light fixture would be incurred after the AC is disconnected. 9. There exists stray capacitance between LED light fixture and aluminum substrate, and the light fixture will have transient slight brightness the moment the mains is connected and the aluminum substrate is connected to the earth (the whole light fixture connected to the earth). This is of no abnormalities for a non-isolated LED driver. And if the above issue needs to be avoided, please replace the non-isolated with the isolated.
---------------------------	--

■ **Product Characteristic Curves**

PF Curve 1

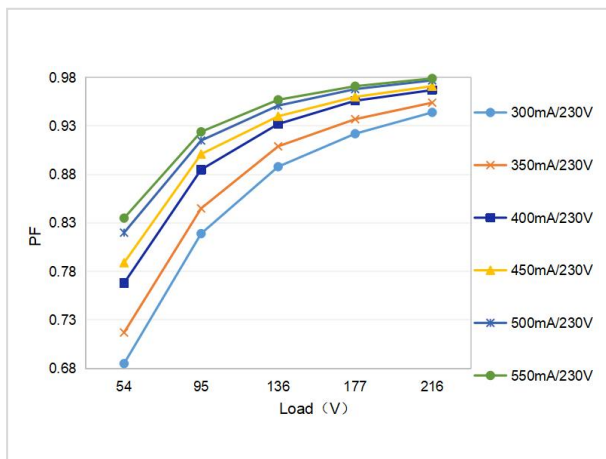


Efficiency Curve 1

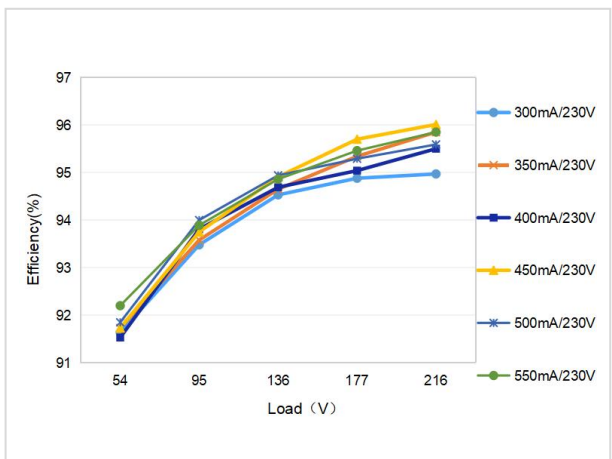


■ **Product Characteristic Curves**


PF Curve 2

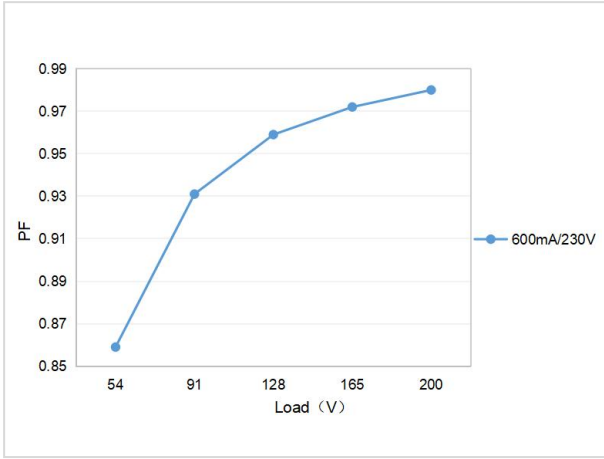


Efficiency Curve 2

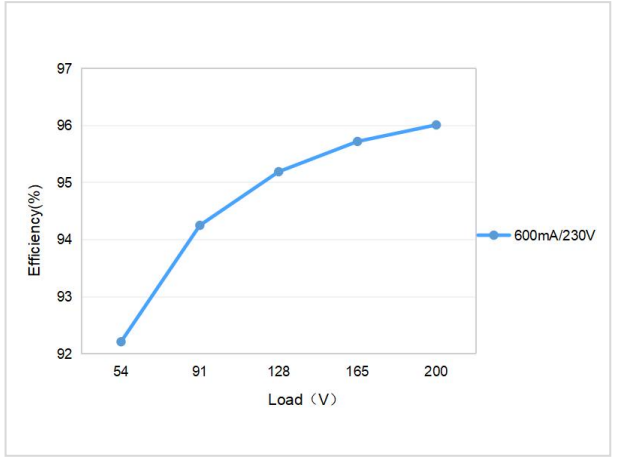


PF Curve 3

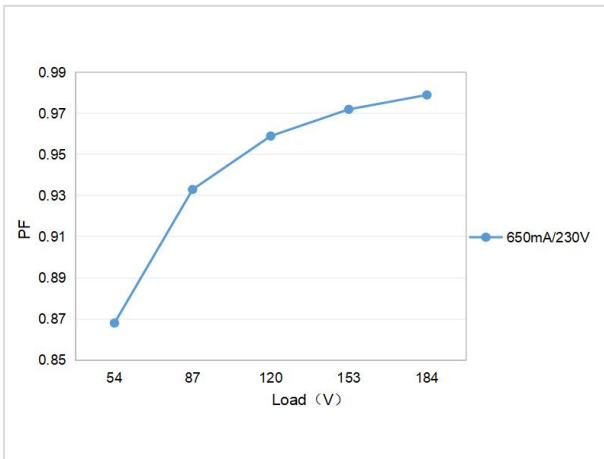


Efficiency Curve 3

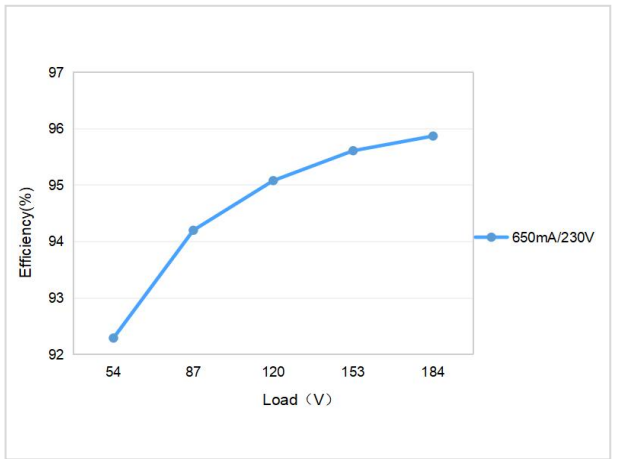

PF Curve 4

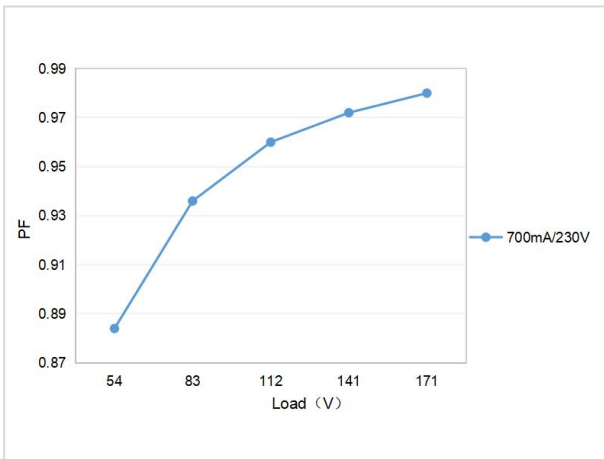


Efficiency Curve 4

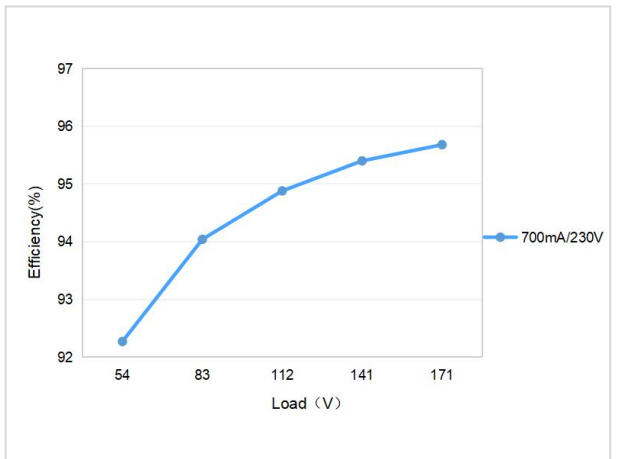


Product Characteristic Curves


PF Curve 5

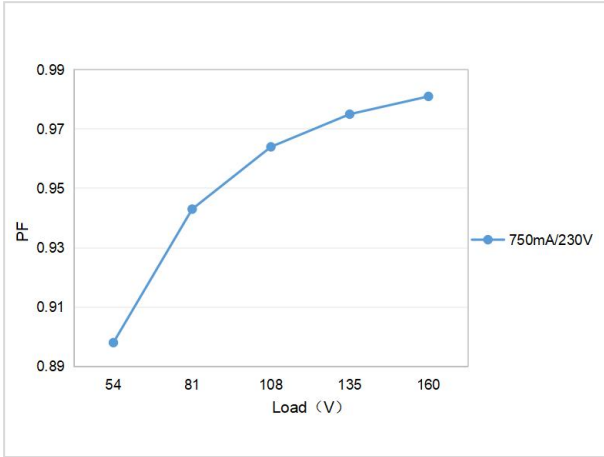


Efficiency Curve 5

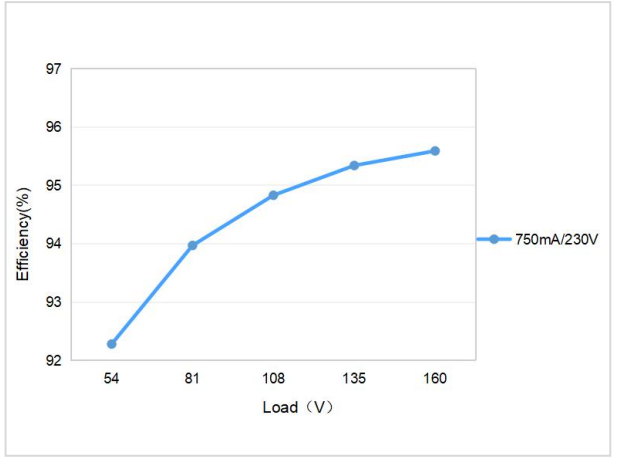

Lifetime Curve

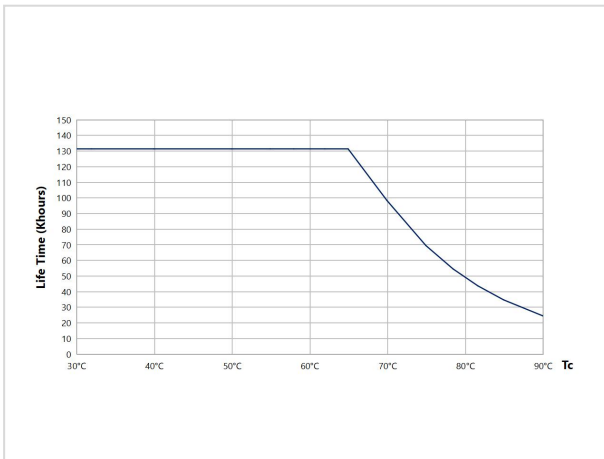

Tc Point Testing Diagram

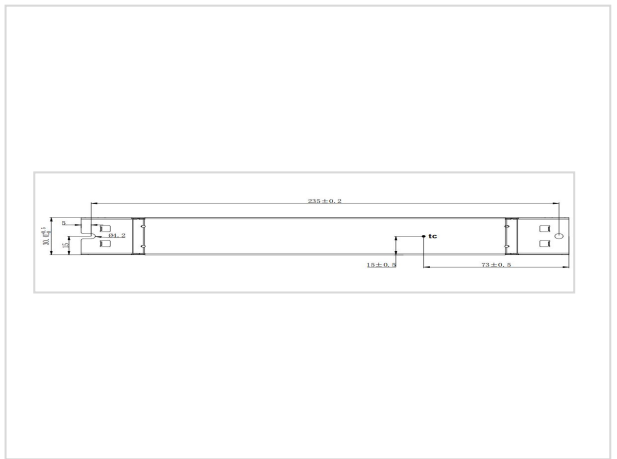

Product Definitions

Product Terminal

INPUT	
AC-L	AC live wire input
AC-N	AC neutral wire input
	Earth wire

OUTPUT	
LED+	Positive Electrode Output of LED Driver
LED-	Negative Electrode Output of LED Driver

■ **Product Definitions**


Product DIP Switch

I rated (CC)	1	2	3	4
300mA (54-216Vdc)	ON	ON	ON	ON
350mA (54-216Vdc)	-	ON	ON	ON
400mA (54-216Vdc)	-	-	ON	ON
450mA (54-216Vdc)	ON	-	-	ON
500mA (54-216Vdc)	ON	ON	-	-
550mA (54-216Vdc)	-	-	-	ON
600mA (54-200Vdc)	-	-	ON	-
650mA (54-184Vdc)	-	ON	-	-
700mA (54-171Vdc)	ON	-	-	-
750mA (54-160Vdc)	-	-	-	-

Remark: "-": shift OFF

■ **Structure & Dimensions (unit: mm)**

Model	Overall Appearance (L*W*H)	Distance Between 2 Positioning Holes (L)	Diameter of Positioning Hole (D)
LF-FMR120YS	245*30*21 mm (±0.5mm)	235 mm (±0.2mm)	4.2 mm

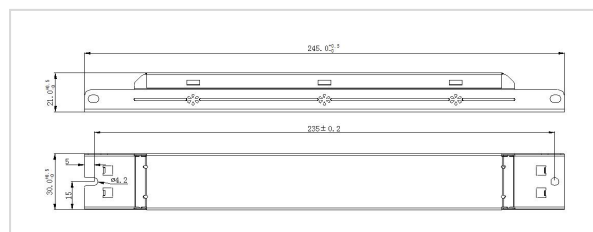

■ Packaging Specifications

Model	LF-FMR120YS
Carton Size	385*285*210mm (L*W*H)
Quantity	8 pcs/layer; 6 layers/ctn; 48 pcs/ctn
Weight	0.19 kg/pc; 9.62±5% kg/ctn

■ Transportation and Storage

1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

2. Storage

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Technology Co., Ltd. reserves the right to interpret any contents of this specification.