
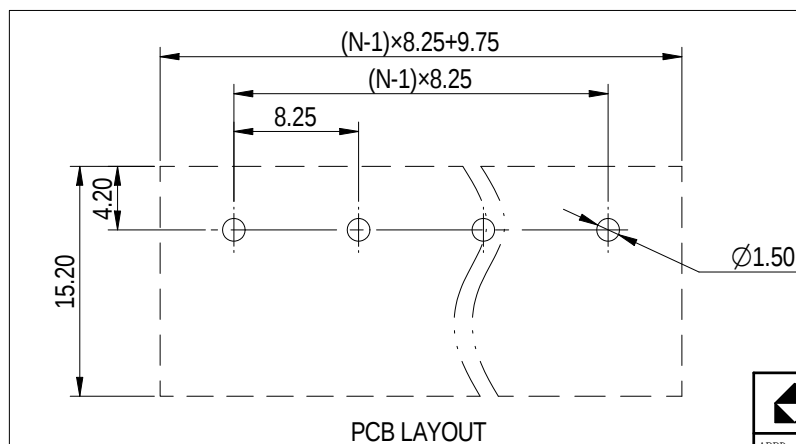


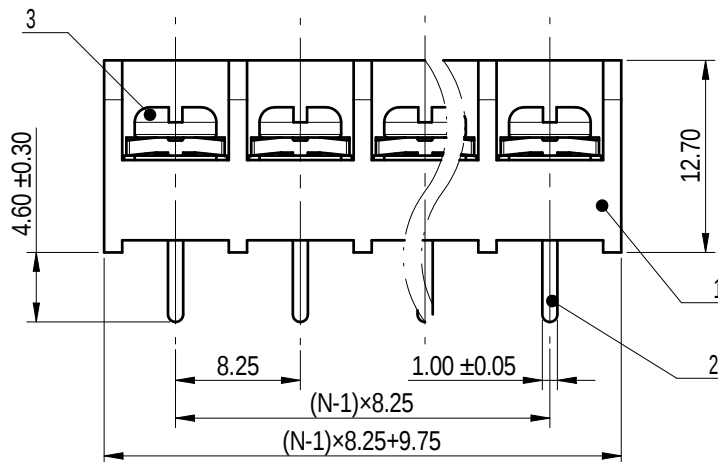


未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

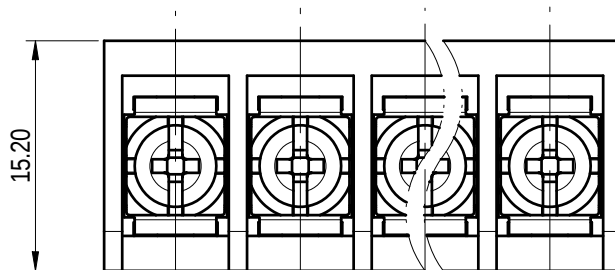

Note: The A&Z(H) in the name means: A(H) and Z(H).

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/20	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)		22~12	/
间距/Pitch(mm)/线数范围/Poles		8.25/N=02~22P	/
使用温度范围/Operating temperature(°C)		-40~+105	/
符合RoHS环保要求/Conform to RoHS		Yes	/

		MATERIAL:		SURFACE/COLOR:	
MAT NO./REV:		- / 00		MAT STATUS: 批量	
APPD: 蓝贵凡		2023.06.06		NAME	
CHKD: 曹利彬		2023.06.06		DG36S-B-XXP-1Y-00A&Z(H)	
DRFT: 姜民洁		2023.06.06		DRAWING NO.	
		A4		TYPE	
		(inch)		CUSTOMER DRAWING	
200066717		DRAWING STATUS		SCALE	
200066717		已发布		2:1	
SHEET		1/1		SHEET	