

## 1. Product Description

LF-GDE030YG series is a 30W constant current LED driver. It has Triac dimming function and is compatible with main trailing-edge dimmers on the market. Its output current is adjustable via the DIP switch from 550mA to 700mA, in steps of 50mA. It is flicker free during the whole process of dimming, which provides comfortable LED lighting for users.

#### 2. Product Features

- Plastic casing
- Triac dimming function
- Suitable for Class II light fixtures
- Flicker free during the whole process of dimming
- Warranty: 5 years (Please refer to the warranty condition.)
- Certifications: ENEC, CE, RCM, CCC, TUV

## 3. Applications

- Down light
- Ceiling light



## 4. Electrical Characteristics

| Model             |                                 | LF-GDE030YG                                                                                  |            |       |       |  |  |
|-------------------|---------------------------------|----------------------------------------------------------------------------------------------|------------|-------|-------|--|--|
|                   | Output Voltage                  | 25-40V (Within 33-40V, the dimming effect is the best.)                                      |            |       |       |  |  |
| Output            | Output Current                  | The output current can be adjusted via the DIP switch. Please refer to the DIP switch table. |            |       |       |  |  |
|                   | Catput Carrotti                 | 550mA                                                                                        | 600mA      | 650mA | 700mA |  |  |
|                   | Ripple Voltage                  | <1V (20MHz)                                                                                  |            |       |       |  |  |
|                   | Current Accuracy                | ±6% @230VAC                                                                                  |            |       |       |  |  |
|                   | Temperature Drift               | ±10%                                                                                         |            |       |       |  |  |
|                   | Line Regulation                 | ±6%                                                                                          |            |       |       |  |  |
|                   | Start-up Time                   | 230Vac <0.5S                                                                                 |            |       |       |  |  |
|                   | Line Regulation                 | ±6%                                                                                          | ±6%        |       |       |  |  |
|                   | Input Voltage                   | 220-240VAC (voltage limit : 198-264VAC)                                                      |            |       |       |  |  |
|                   | Input Frequency                 | 47-53Hz                                                                                      |            |       |       |  |  |
|                   | Input Current                   | 0.18A Max                                                                                    |            |       |       |  |  |
| Input             | Power Factor                    | ≥0.9@230VAC                                                                                  |            |       |       |  |  |
|                   | THD                             | ≤20%                                                                                         |            |       |       |  |  |
|                   | Efficiency                      | ≥82%@230Vac                                                                                  |            |       |       |  |  |
|                   | Inrush Current                  | ≤30A/350uS@230                                                                               | OVAC (Max) |       |       |  |  |
|                   | Leakage Current                 | ≤0.7mA                                                                                       |            |       |       |  |  |
| Protective        | Open Circuit Protection         | ≤70V (Reconnecting the AC power supply is needed.)                                           |            |       |       |  |  |
| Features          | Short Circuit Protection        | Hiccup mode (Reconnecting the AC power supply is needed.)                                    |            |       |       |  |  |
|                   | Working Temperature             | -30℃ ~ +50℃                                                                                  |            |       |       |  |  |
| Environment       | Working Humidity                | 20-90%RH (no condensation)                                                                   |            |       |       |  |  |
| Conditions        | Storage<br>Temperature/Humidity | -40℃ ~ 80℃(six months under class I environment);<br>10-90%RH (no condensation)              |            |       |       |  |  |
|                   | Atmospheric Pressure            | 86-106KPa                                                                                    |            |       |       |  |  |
|                   | Certificates                    | ENEC, CE, TUV, RCM, CCC                                                                      |            |       |       |  |  |
|                   | Withstanding Voltage            | I/P-O/P: 3.75KV, 5mA, 60s                                                                    |            |       |       |  |  |
|                   | Insulation Resistance           | I/P-O/P: 500VDC, >100MΩ                                                                      |            |       |       |  |  |
| Safety &<br>Norms | Surge Rating                    | IEC61000-4-5 (L-N: 1KV )                                                                     |            |       |       |  |  |
| Nomis             | Safety Standard                 | EN61347, GB195                                                                               | 10         |       |       |  |  |
|                   | EMI                             | EN55015, EN61000-3-2                                                                         |            |       |       |  |  |
|                   | EMS                             | EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547                                                      |            |       |       |  |  |




| Others                | IP Rating                                                                                                                                                                                                                                                                                                            | IP20                                                                                                                                                                                                                                                            |  |  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Others                | Warranty Condition                                                                                                                                                                                                                                                                                                   | 5 years (Tc ≤ 87 °C)                                                                                                                                                                                                                                            |  |  |
| Testing<br>Equipment  | DPO3014, DC electron chamber, lightning surg                                                                                                                                                                                                                                                                         | OMA6530, digital power meter: CHROMA66202, Oscilloscope: Tektronix ic load: M9712B, LED board, constant temperature and humidity generator: Everfine EMS61000-5B, rapid group pulse generator: spectrum analyzer: KH3935, hi-pot tester: TH9201B, light flicker |  |  |
| Testing<br>Conditions | Unless otherwise stated, the parameters of the power factor and efficiency are the test results under the ambient temperature of $25^{\circ}$ C and humidity of 50%, AC input of 230V and 90% load. The tests above were without connecting any dimmer.                                                              |                                                                                                                                                                                                                                                                 |  |  |
| Remarks               | 1. It is recommended that customers should install overvoltage and undervoltage protection devices and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity.                                                                                |                                                                                                                                                                                                                                                                 |  |  |
|                       | 2. The PC cover, casing, end caps and other parts of the LED driver inside the LED light fixture must conform to UL94-V0 flammability standard or above.                                                                                                                                                             |                                                                                                                                                                                                                                                                 |  |  |
|                       | 3. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer should re-confirm the EMC of the whole LED light fixture. |                                                                                                                                                                                                                                                                 |  |  |

# 5. Circuit Breaker & Relevant Parameters

| Name                                                                                  | Value  | Remark                                                                      |
|---------------------------------------------------------------------------------------|--------|-----------------------------------------------------------------------------|
| Surge peak current (Ipeak)                                                            | 6.3 A  | Input voltage 230Vac                                                        |
| Surge half-peak time (Twidth)                                                         | 150 us | Input voltage 230Vac, measure the time for Ipeak to drop to the half value. |
| Quantity of the same model driver that a type-B<br>16A circuit breaker can configure. | 53 pcs |                                                                             |

This table shows the reference data of other types of circuit breakers.

| type | rank | relative driver<br>quantities |
|------|------|-------------------------------|
|      | 10A  | 33 pcs                        |
|      | 13A  | 42 pcs                        |
| В    | 16A  | 53 pcs                        |
|      | 20A  | 66 pcs                        |
|      | 25A  | 82 pcs                        |
|      | 10A  | 55 pcs                        |
|      | 13A  | 71 pcs                        |
| С    | 16A  | 89 pcs                        |
|      | 20A  | 110 pcs                       |
|      | 25A  | 137 pcs                       |

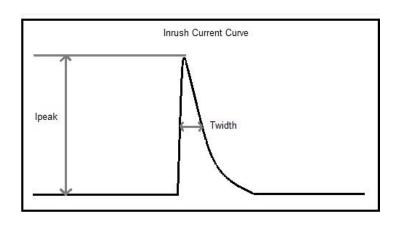





### 6. DIP Switch Table

| DIP switch table |        |         |    |    |
|------------------|--------|---------|----|----|
| Та               | Vo DC  | Current | 1  | 2  |
| 50℃              | 25-40V | 700mA   | ON | ON |
|                  |        | 650mA   | ON | _  |
|                  |        | 600mA   | _  | ON |
|                  |        | 550mA   | _  | _  |

# 7. Dimensions (Unit: mm; Tolerance: +0.5mm)

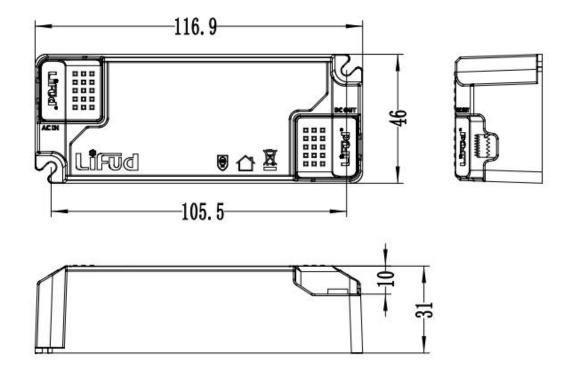

# 8. TC Point (on the bottom of the casing)

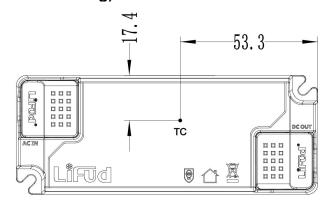





## 9. Packaging Specifications

| LF-GDE030YG          |                                |  |  |  |
|----------------------|--------------------------------|--|--|--|
| packaging dimensions | 385*285*210mm (L*W*H)          |  |  |  |
| quantities           | 12 pcs/layer; 72 pcs/ctn       |  |  |  |
| weights              | 0.089 kg±5%/pc; 8.95 kg±5%/ctn |  |  |  |


### 10. Product Feature Curves

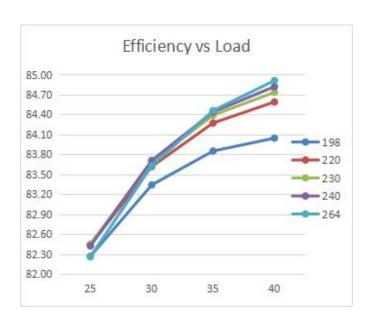

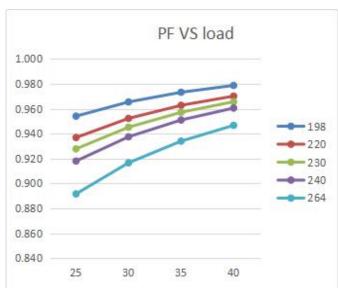


### 11. Lifetime Curve


The lifetime of the driver is calculated under the condition that the casing temperature in an airtight space reaches  $40^{\circ}$ ,  $50^{\circ}$ ,  $60^{\circ}$ ,  $70^{\circ}$ ,  $80^{\circ}$  and  $90^{\circ}$ .

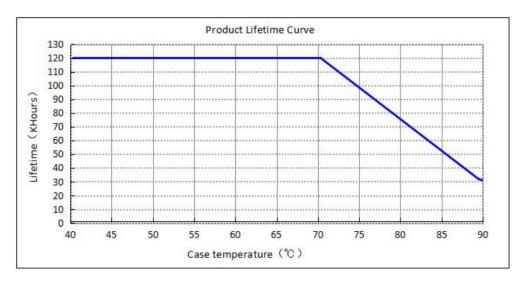



### 12. Dimming Curves

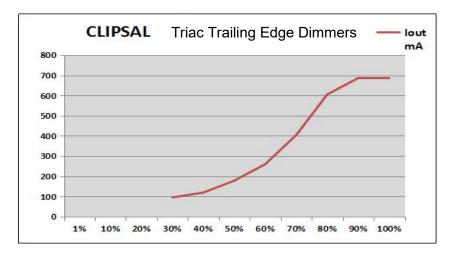

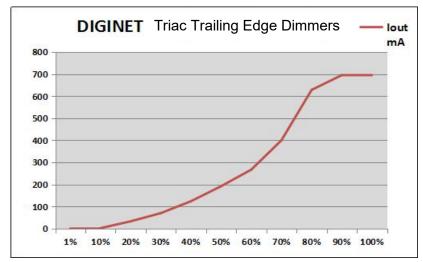

1. Verified by the LIFUD team, this driver is compatible with these dimmers:

·CLIPSAL: 32E450UDM ·DIGINET: MEDM


When starting up with a dimmer connected, there will be output current overshooting. The overshooting amplitude is shown as below. (Please choose proper LEDs according to their specifications. Feel free to contact LIFUD team for technical support.)

| Output Voltage                         | Output Current |       |       |       |
|----------------------------------------|----------------|-------|-------|-------|
| Output Voltage                         | 550mA          | 600mA | 650mA | 700mA |
| 25-33V start-up overshooting amplitude | ≤30%           | ≤30%  | ≤30%  | ≤30%  |
| 33-40V start-up overshooting amplitude | ≤10%           | ≤10%  | ≤10%  | ≤10%  |

- 2. If end users do not use the dimmers mentioned above, it's necessary to test if the end users' dimmers are compatible with this driver. End users can conduct the test by themselves or they can send the dimmers to LIFUD team and LIFUD team will conduct the tests for them.
- 3. The signature of on this specification indicates that the customer has confirmed that this LIFUD driver is compatible with their dimmer. And thus LIFUD will not be responsible for any quality complaint caused by incompatible dimmers.



### 13. Wiring diagram

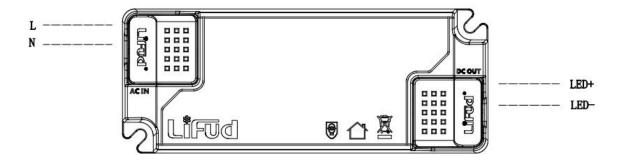

#### 14. Label



Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.